(54) Title: METHOD FOR CONTROLLING A CALL
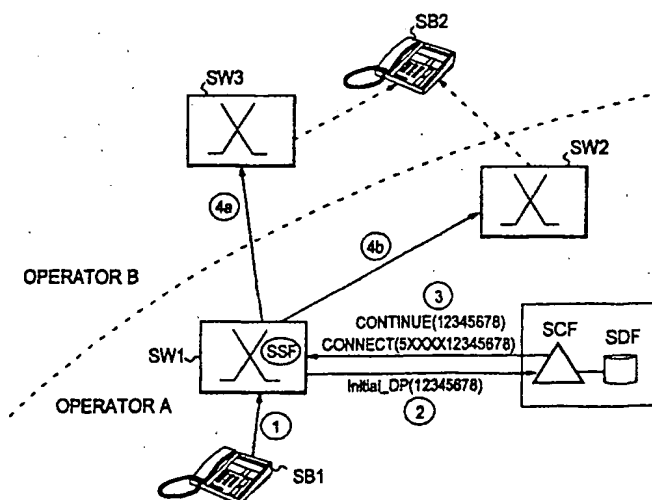
(57) Abstract

The invention concerns a method for controlling a call by using intelligent network. To be able in the entire network to keep entirely within the own network processing of calls intended for a subscriber ported from another operator to the own network at the same time keeping digit analyses in the exchanges as simple as possible, a centralized database SDF is maintained in the intelligent network where routing data is stored on those subscribers who have ported with their original terminal equipment numbers from the network of another operator to the said telephone network. When the data of the call attempt of the calling subscriber meets predetermined conditions, processing of the call attempt is frozen and a query is made to the centralized database. When routing data of the subscriber corresponding to the data of the call attempt is found in the database, the routing data found in the database is given in reply, whereby processing of the call attempt is continued using said routing data.

Method for controlling a call

Field of the invention

This invention generally concerns controlling of a call, especially in
a network where subscribers have ported to the concerned network from the
network of another operator.

Background of the invention

Along with liberalised telelegislation, several countries have seen
the arrival of new teleoperators, who begin competing for customers with the
old operators. For some of these new operators a certain geographically
limited area has been determined in which they may operate. In other words,
some new operators are local operators. It is easier for all new operators to
obtain customers, if the subscriber can port from the old operator's network
to a new operator's network in such a way that the subscriber's telephone
number remains the same.

Such "operator portability" was carried out earlier either through
call forwarding or by number translation. The former alternative means that
the subscriber exchange of the old network automatically routes calls coming
to the subscriber number to the number corresponding to the subscriber's
new location. The latter alternative again means that a number translation of
the called number is done in the old operator's exchange, whereby the num-
ber is given a new prefix identifying that (new) exchange to which the sub-
scriber is connected (in the new operator's network). It is also possible to
give an entirely new number, as is mentioned hereinafter.

Although both said methods are possible, number translation has
been regarded as the better alternative. This is because number conversion
allows better "portability" of services from one network to another. The calling
line identity (CLI) in particular will pass more easily through the network
when number translation is used.

Figure 1 illustrates progress in the number translation method
when subscriber SB1 (whose telephone number is 0181 244 1492), who was
formerly in the network of operator A, has ported to the network of operator
B. Various steps in the method are marked with circled numbers 1...5. A call
coming to the said subscriber from the network of operator A will first come
to the subscriber's former terminal exchange SW1 (step 1). In this exchange

a complete digit analysis is made of the called number, as a result of which a prefix is added before the number to inform that the subscriber in question has been ported to another operator's network. The prefix, the length of which may vary from one system to another, may be e.g. in the form

5   YXXXXX, wherein Y means the subscriber ported to operator B's network while XXXXX states the address of the subscriber's new terminal exchange (SW2) in operator B's network (step 2). The call is rerouted with the aid of this new number (YXXXXX-0181 244 1492). As a result of this routing, data of the call attempt is transmitted to an interoperator link IOL (step 3). In the

10   subscriber's new terminal exchange SW2 a digit analysis of the received number is first performed beginning from the prefix YXXXXX, whereby it is detected that the call ends in exchange SW2 (step 4). Prefix YXXXXX is then dropped and a digit analysis of the actual number is performed using the analysis trees of the exchange's own subscribers (step 5), in consequence of

15   which the correct subscriber line is found.

For those subscribers who have been ported from another operator's network to the own network, it would be desirable that calls initiated from the own network need no more be routed via the old operator's network, because such routing back and forth unnecessarily requires resources also

20   from the old operator's network. The old operator will charge the new operator for the use of these resources, so undesirable extra costs are caused in this way for the call. In some countries the authorities have laid down conditions which the network must meet in such cases. For example, it is a condition in Great Britain that it must be possible to route only in the own network

25   all those calls where the calling subscriber and a subscriber ported from another operator are in the area of the same exchange.

When using the number translation method, a digit analysis must be done in the network's exchange on the whole called number (until the last digit) so that those subscribers can be detected who have been ported from

30   another operator to the own network. When as good characteristics as possible are desired for the entire network in the sense described above (calls ending in the own network are not routed via the network of the called subscriber's old operator), the number of records used for digit analyses will grow in the exchange, whereby the exchange will also need enormously

35   more memory. A possible direct solution to the problem could be by increasing the memory, but in the long term this is not a feasible solution.

A feature logically similar to "operator portability" is number portability, which means that the subscriber's terminal equipment (e.g. a telephone) may be ported in the same network to a geographically other area (to an area of another exchange) keeping the number of the terminal equipment unchanged. US patent 4,754,479 describes a method of implementing number portability. In the area of a cluster formed by several exchanges the solution described in the publication uses a common database, which is decentralized to all exchanges belonging to the cluster. A subscriber can be ported within the cluster to another exchange when such a change is made in the database of all exchanges which indicates the new connection between the terminal equipment number and that exchange to which the subscriber's terminal equipment (telephone) has been ported.

In principle, it would be possible to use this solution also for detecting subscribers ported from another operator, but the solution suffers from the same drawbacks as the number translation method described above, since in each exchange there must be data on all ported numbers. To avoid the problems described above, one might try decentralizing the solution according to the US patent so that a certain exchange will have data on a part of ported numbers only. In this case, however, extra logic must be generated in the network always to route calls through the correct exchange. At the same time, undesirable extra speech paths would be brought about in the network.

Summary of the invention

The purpose of the invention is to eliminate the drawbacks described above and to bring about a method allowing efficient avoidance of both unnecessary traffic between operators and expansion of data structures in exchanges with the resulting drawbacks.

This objective is achieved with the solution defined in the first independent claim.

The idea of the invention is to utilize intelligent network by generating such a database centralized in the intelligent network, wherein those subscriber numbers are stored whose corresponding subscribers have been ported to the own network from another operator. When the call attempt's data meets predetermined conditions (that is, when the called number is, for example, in a certain number space), a query is made to the database

whether the subscriber is one who has been ported to the operator's own network. The query results either in new routing data or in data indicating that routing of the call can be continued based on existing routing data.

By using the method according to the invention it is possible to conclude from all calls initiated from the new operator's network whether they will end up with a subscriber ported to the new operator's network, so it is possible also to avoid such traffic between the networks of the old operator and the new operator which will cause costs. By analysing a certain limited number of digits the exchange is able to decide whether a query need be made to the database. In practice, the number of these digits is very limited, because they are limited to that number space where the other operator has subscribers in the operating area of the operator owning the network. If the subscriber has been ported from another operator to the own network, it is also possible after the reply received from the database to limit the digit analysis to a very limited number of digits, for example, to a prefix received from the database or to its part.

The invention also achieves the benefit that maintenance of data related to the facility in question becomes considerably easier, because data need not be copied for databases located in several different places.

Another extra benefit is that when introducing new subscribers to the network from another operator's network, changes in analysis trees essential to the basic functions of the exchange will be needed considerably less frequently than before. This is essential, because faults made in changes to analysis trees may affect the routing functions of the exchange and this way probably the operation of the entire network. When using the solution according to the invention changes need be made to analysis trees only when the first subscriber per a certain number space is brought to the network. Other changes concern the centralized database, whereby any errors made in a change situation will only affect the concerned subscriber's calls.

List of figures

In the following the invention and its advantageous embodiments are described in greater detail referring to Figures 2-6 in examples according to the appended drawings, wherein

Figure 1   illustrates implementation of the known number translation
            method;
Figure 2   illustrates routing functions to be performed in an exchange;
Figure 3   illustrates routing as part of call processing;
5   Figure 4   shows a conventional data structure used for digit analyses;
Figure 5   shows a basic call state model associated with the calling party;
            and
Figure 6   illustrates implementation at network level of the method accord-
            ing to the invention.
10

Detailed description of the invention

As a background to the solution according to the invention and to
the above description of the known technology an illustration is first given of
routing functions to be performed in a telephone exchange (Figures 2 and 3)
15   and of the related digit analysis (Figure 4).

The routing principle is hierarchial according to Figure 2 in such a
manner that origin and digit analyses are carried out at the beginning on the
basis of information on the calling subscriber and the selected digits. The
origin analysis is carried out to find out the information relating to the origin of
20   the call. The information concerning the subscriber may be e.g. the origin of
the incoming circuit group (or circuit) and the subscriber class of the calling
subscriber. Thus the same selected digit series received from different in-
coming circuit groups or from subscribers belonging to different classes may
lead to a different result. The destination is obtained as a result of the analy-
25   ses conducted. For example, there may be 65,000 destinations in the Appli-
cant's DX 200 exchange, each of which may contain 5 subdestinations.
Subdestinations are typically divided into three main classes: connections
directed to another exchange, subscriber lines in the same exchange and
service triggers that initiate some service. A service of this kind may be, for
30   example, the number translation described above, a voice announcement
delivered to the subscriber or a more complicated service that requires a
negotiation with a more remotely situated database (such as the service
control point SCP in an intelligent network).

The destination also includes a so-called charging index which is
35   supplied to the charging analysis (not shown in the figure).

One destination typically contains information on several, e.g. five different subdestinations. The subdestinations can be arranged within the destination into a given priority order in such a manner that one of them is the main alternative for routing. If e.g. a congestion is detected on the first
5   subdestination, the call can be ported to some other subdestination.

Each subdestination is further connected to one outgoing or internal route. The circuit groups associated with the desired route are then tested in a given order to find an idle circuit. In this context a circuit refers to a combination of two transmission channels which enables a bidirectional
10   transmission of signals between subscribers. A circuit group in turn refers to a set of circuits with a similar purpose of use.

When a call arrives at an exchange, the exchange typically generates a copy of the call control program and allocates it to said call. The call control program for its part calls routing functions. The call control program
15   attends to the call until it is terminated, whereupon the copy is deleted.

Figure 3 illustrates these functions and in what way digit analysis and subdestination search (e.g. number translation) are part of the processing of a call. A call control block CC supplies control information (containing e.g. the selected number and information indicating with which analysis tree
20   the digit analysis is to be carried out) to a digit analysis block DA that returns to the call control block information on the destination corresponding to the selected number. The destination refers in this context to a set of traffic control alternatives (i.e. subdestinations) that have been found on the basis of the digit analysis and other information, such as the subscriber class and the
25   incoming circuit group. The call control block will forward these alternatives to the route selector RS that carries out an analysis of its own and returns the result to the call control block CC. This result is the subdestination mentioned above. The selection process employs data associated with the call attempt which data is known to the call control block CC.

30   In the manner described above, e.g. number translation is arrived at based on the call attempt's data.

The digit analysis to be performed in connection with routing is based in the telephone exchange (e.g. in Applicant's DX 200 exchange) on a data structure wherein records form a hierarchial tree structure. Each record
35   contains e.g. 16 fields, one of which corresponds to a certain key (0, 1, 2,...9, *, #, etc.) of the telephone. The individual field is either empty (that is, it is not

in use and thus contains nothing) or it contains a pointer. The pointer (some
binary number in practice) may point either to the following record or to an
object which is the result of the digit analysis. In practice an empty field
means that no digit analysis is performed for the corresponding telephone
5   key.

Figure 4 illustrates the principle described above. The data struc-
ture is formed by several records 11, each of which has 16 fields, which are
marked with reference marks 0...9, a...f. An analysis to be performed e.g. for
telephone number 408178 will return object D and an analysis performed for
10   telephone number 504178 will return object E. The analysis is done by pro-
ceeding in the tree structure one chosen digit at a time by examining the
contents of the field corresponding to the chosen digit and by proceeding to
the record indicated by the pointer in said field, where the contents of the
field corresponding to the following digit are examined, etc. The field corre-
15   sponding to the digit which is examined last will give the result (destination)
of the analysis, which is supplied to the route selector block RS.

The foregoing is a brief description of those basic exchange func-
tions which are also utilized by the present invention. In the following the
progress of a call controlled in accordance with the invention will be de-
20   scribed in greater detail referring to Figure 5, which shows an Originating
Basic Call State Model O_BCSM associated with the calling party's call, and
to Figure 6, which shows the progress of a call attempt at network level. In
this context, terms and abbreviations relating to the intelligent network are
assumed to be known, so the intelligent network will not be described in
25   greater detail. The interested reader may get a better idea of the intelligent
network e.g. from ITU-T's recommendations Q.121X or from Bellcore's AIN
recommendation. A brief summary of the intelligent network can also be
found in international patent applications PCT/FI97/00500...PCT/FI97/00506
(the same description in all). It can also be mentioned that in this context
30   intelligent network does not only mean a network working exactly according
to a certain standard, but the idea according to the invention may be used in
any network architecture providing advanced services and containing a cen-
tralized database to which queries may be made by way of a signalling net-
work.

35   According to the invention, in a centralized database of the intelli-
gent network routing data are maintained on those subscribers who keeping

their terminal equipment numbers have ported from another operator's network to the network in question. Since such a function is already defined in intelligent network standards, that is Service Data Function SDF, it is advantageous to maintain the mentioned data e.g. in SDP. SDP is a database containing the Service Data Function SDF and customer and network data. The Service Control Point SCP uses SDP services directly via a signalling or data network.

The database may contain e.g. a table containing the subscriber's number and a corresponding prefix identifying the subscriber's new terminal exchange. Instead of the prefix also that number may be used which in the numbering plan used corresponds to the subscriber's new location. The prefix is used as an example in the following.

The parts of the call state model shown in Figure 5 are Points in Call PIC, Detection Points DP, transitions and events. The PICs identify the functions of the call control function CCF that are required to complete one or more calls/connection states. The DPs indicate the points in the calling and connection procedure at which the control can be passed to the intelligent network. (The figure shows each detection point denoted with a name; in the ETSI (European Telecommunications Standards Institute) standards, the names pertain to the actual detection points, whereas in the ITU-T standards they pertain to the messages that the service switching function SSF sends to the SCP from that detection point). The transitions indicate the normal flow of the call/connection process from one PIC to another. The events cause transitions into the PIC and out of the PIC. No full description is given here, but reference is made to recommendation Q.1214 where anyone interested in the matter can find a more detailed description.

The entry event of PIC 1 (O_Null & Authorize_ Origination_Attempt) is a disconnection of the previous call (DP 9 or DP 10). The function in PIC 1 is setting of the line in an idle state and checking of the calling party's rights (check of the calling party's right to make the call having given characteristics). After (the calling subscriber's) rights have been verified, initial information is collected in PIC 2 from the calling party. This information is e.g. service codes and dialled digits.

Thereupon the call control moves on to PIC 3 where the obtained information is analysed to determine the routing address and call type. Should it be found at this stage that the called number is in a predetermined

number area (that area where other operators have numbers in the area of the own network), a query is triggered in DP 3 to the intelligent network and processing of the call attempt is "freezed". The triggering condition is set up in the exchange in a manner known as such (e.g. using known MML com-

5   mands).

The service switching function SSF hereby transmits the Initial_DP message (a message between SSF and SCF which is defined in the standards and which SSF generates on detecting a service request in any DP of the call model) to the service control function SCF. In the Initial_DP

10   message at least the service identifier and the called number are transmitted to SCF, whereupon SCF will search the corresponding number from the database of ported subscribers SDP. Should the number not be found, SCF will transmit to SSF in reply a CONTINUE message according to standards, which means that SSF may continue, in a normal manner, the processing of

15   the call attempt which was stopped earlier. If the number is found in the database, SCF will return to SSF a CONNECT message according to standards, with which a connection is established with the desired object or the call is rerouted to another object. SCF writes such a number in the CONNECT message which in the database corresponds to the number received

20   by SCF from SSF.

If the return message is CONNECT, the processing of the call attempt returns to PIC 3, where a new digit analysis is done on the number received from SCP, whereafter the process proceeds to PIC 4. If the return message was CONTINUE, the processing of the call attempt will go on di-

25   rectly to PIC 4.

From this stage forward the call control proceeds in a known manner, whereby e.g. routing of the call is performed in PIC 4. Starting information is sent to the terminating basic call state model, and the call control is passed to the terminating half. The entry event of PIC 5 is constituted

30   by an indication from the terminating basic call state model that the called party has answered the call. The function at PIC 5 consists of connection establishment between the calling and called parties and collection of charging data. Exit events include a service request obtained from the calling party (DP 8), information on the fact that either the calling party or the called

35   party has disconnected the call (DP 9), or occurrence of an error situation (transfer to PIC 6, at which errors and exceptional situations are handled).

The above presentation is illustrated at network level in Figure 6. In the example shown in the figure, subscriber SB1 in the network of operator A dials subscriber SB2, whose telephone number is 12345678, which according to the used numbering plan corresponds to the area of operator B.

5   In the early part of the connection setup SSP exchange SW1 receives information about the A-subscriber's wish to make a call. This information may arrive e.g. as a Setup message according to standard Q.931 or the exchange may identify closing of the subscriber loop as a result of lifting of the handset by the subscriber. The information causes transfer to

10   PIC 2 in the state model of a call according to Figure 5 and further to PIC 3 (step 1). If it is detected in PIC 3 that the called number is in a predetermined number range, a query to SCF will be triggered in DP 3 (step 2), otherwise entirely normal processing of the call attempt will continue. If the query was made, either a CONTINUE message or a CONNECT message is received

15   as reply from SCF (step 3), depending on whether the subscriber is one who has been ported from operator B to operator A.

       After the reply received from SCF, the call control proceeds in the known manner (described above) using as the called number either just the original number (step 4a) or e.g. the original number provided with a prefix

20   (step 4b). It is essential for the analysis tree that if the subscriber has been ported to the network of operator A, only the prefix of the number or a part of it need be analysed.

       When the terminating party's call model is initiated in PIC 4, the exchange of A-subscriber (SW1) will transmit an initial message to the ex-

25   change of the called subscriber through the signalling network. This initial message may be either an Initial Address Message IAM, if the common channel signalling system utilizes the ISDN User Part ISUP, or an Initial Address Message with Additional Information (IAI), if the Telephone User Part TUP is utilized. As a result of the initial message, the terminal exchange

30   of the called subscriber starts processing the call attempt in a known manner according to the (terminating) basic call state model.

       The longer the called number is analysed in the exchange of the calling subscriber, the greater the certainty that the subscriber corresponding to the number has been ported from another operator to the own network,

35   whereby correspondingly less queries will be made to the database. Thus a

suitable compromise must always be found between depth of analysis and size of analysis trees.

The idea according to the invention can be used also to implement portability of the number (geographically) by maintaining in a central-

5   ized database routing data on those subscribers of the own network who have been ported with their original numbers to areas of such exchanges which cover a number space to which the subscriber numbers do not belong. In this case a query is made to the database, if the called number belongs to the exchange's own number space.

10   SDP is presented above as an example of location of the central-ized database according to the invention. However, it must be understood that the centralized database according to the invention may be located also in other physical entities of the intelligent network, e.g. in a service control point SCP, in an adjunct AD or in a service node SN, which along with SDP

15   are those physical entities of the intelligent network where SDF may be lo-cated.

Although the invention was described above referring to examples shown in the appended drawings, it is obvious that the invention is not lim-ited to these, but it may be changed within the framework of the inventive

20   idea presented in the following claims. Although it is advantageous to make the decision on a query to the intelligent network depending on which is the called number, it is possible in a logical sense to make the decision based on any other information or set of information belonging to the data of the call attempt, provided that the terminal equipment can be identified unambigu-

25   ously in this manner. It must also be noticed that although the database according to the invention is centralized, the service control function SCF transmitting requests to it may be decentralized.

Claims

1. Method for controlling a call by using an intelligent network, according to which method processing of a call attempt is performed in connection with the telephone network's service switch function SSF in accordance with the originating basic call state model O_BCSM,

c h a r a c t e r i z e d in that

- a centralized database (SDF) is maintained in the intelligent network where routing data is stored on those subscribers who have ported with their original terminal equipment numbers from the network of another operator to said telephone network,

- when the data of the call attempt of the calling subscriber meets predetermined conditions, processing of the call attempt is freezed and a query is made to the centralized database, and

- when routing data of the subscriber corresponding to the data of the call attempt is found in the database, the routing data found in the database is given as a reply, whereby processing of the call attempt is continued by using said routing data.

2. Method as defined in claim 1, c h a r a c t e r i z e d in that if routing data of the subscriber corresponding to data of the call attempt is not found in the database, routing of the call attempt is continued based on the routing data contained in the data of the call attempt.

3. Method as defined in claim 1, c h a r a c t e r i z e d in that a query is made, if the called terminal equipment number contained in the data of the call attempt belongs to a predetermined number range.

4. Method as defined in claim 1, c h a r a c t e r i z e d in that in connection with the query the called terminal equipment number is transmitted to the database and at least a prefix which is added to the said number and which identifies the exchange of the terminal equipment in the telephone network is given in reply from the database.

5. Method for controlling a call by using an intelligent network, according to which method processing of a call attempt is performed in connection with the telephone network's service switch function SSF in accordance with the originating basic call state model O_BCSM,
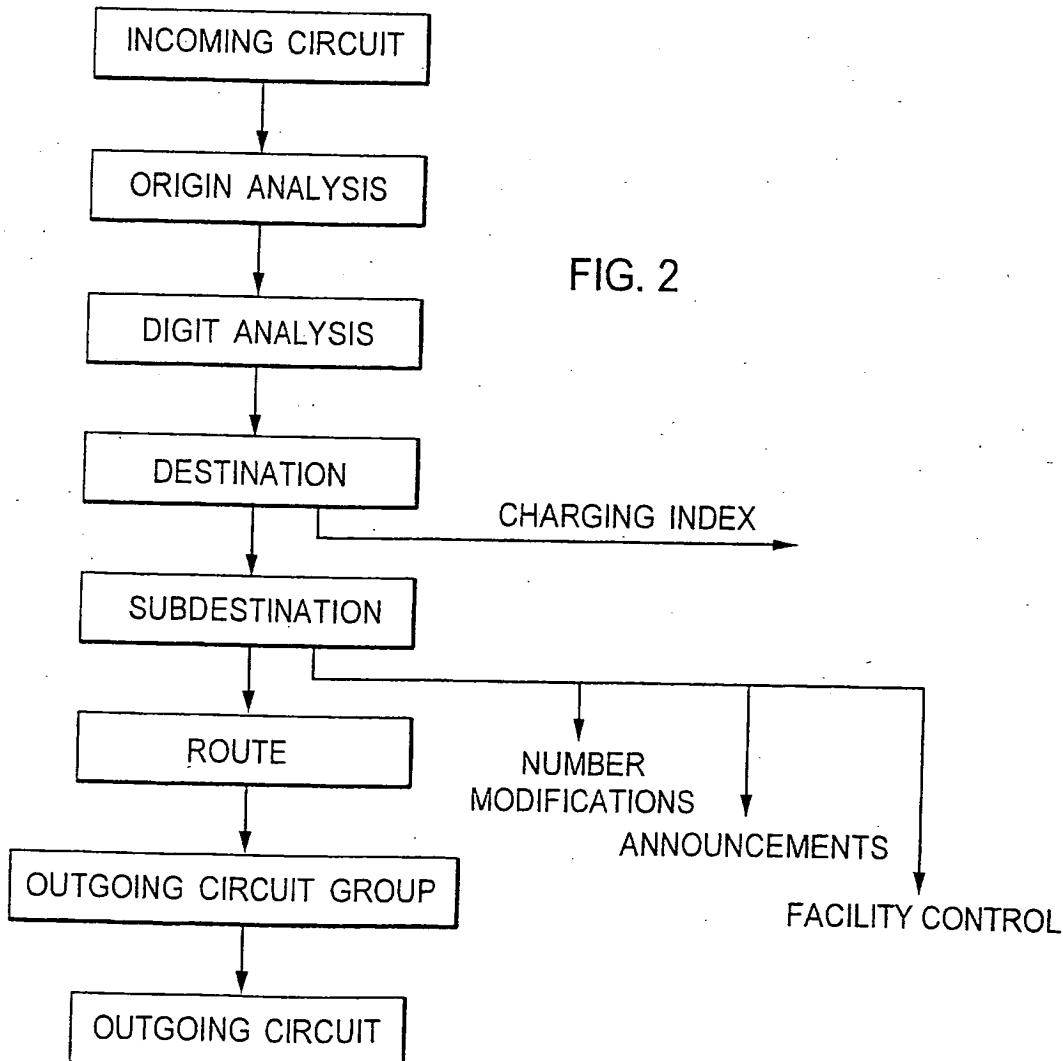
c h a r a c t e r i z e d in that

- a centralized database (SDF) is maintained in the intelligent network where routing data is stored on those subscribers who have ported

in the telephone network with their original terminal equipment numbers to the area of such an exchange which covers a number range to which the terminal equipment number does not belong,

- when the data of the call attempt of the calling subscriber meets
5   predetermined conditions, processing of the call attempt is freezed and a query is made to the centralized database, and

- when routing data of the subscriber corresponding to the data of the call attempt is found in the database, the routing data found in the database is given in reply, whereby processing of the call attempt is continued by
10   using said routing data.

OPERATOR A   OPERATOR B

5XXXXX-
0181 244 1492 ③   IOL   ④ CALLED-NUMBER
                                       ANALYSIS
① X

0181 244 1492 ②   ⑤ SUBSCRIBER ANALYSIS:
                                       0181 244 1492

FIG. 1

SB1

INCOMING CIRCUIT

ORIGIN ANALYSIS

DIGIT ANALYSIS   FIG. 2

DESTINATION
                    CHARGING INDEX

SUBDESTINATION

ROUTE
            NUMBER
            MODIFICATIONS
                    ANNOUNCEMENTS
OUTGOING CIRCUIT GROUP
                        FACILITY CONTROL

OUTGOING CIRCUIT

FIG. 3

D
(408178)

E
(504178)

FIG. 4

O_Abandon

1. O_Null & Authorize Origination _Attempt

6. O_Exception

10

1　Orig.Attempt_Authorized

2. Collect_Info

2　Collected_Info

3. Analyse_Info

3　Analysed_Info

4. Routing & Alerting

4

Route_Select_Failure

7　O_Answer

5

O_Call_Party_Busy

9

5. O_Active

6

O_Disconnect

8

O_No_Answer

O_Mid_Call

TRANSITION

DETECTION POINT (DP)
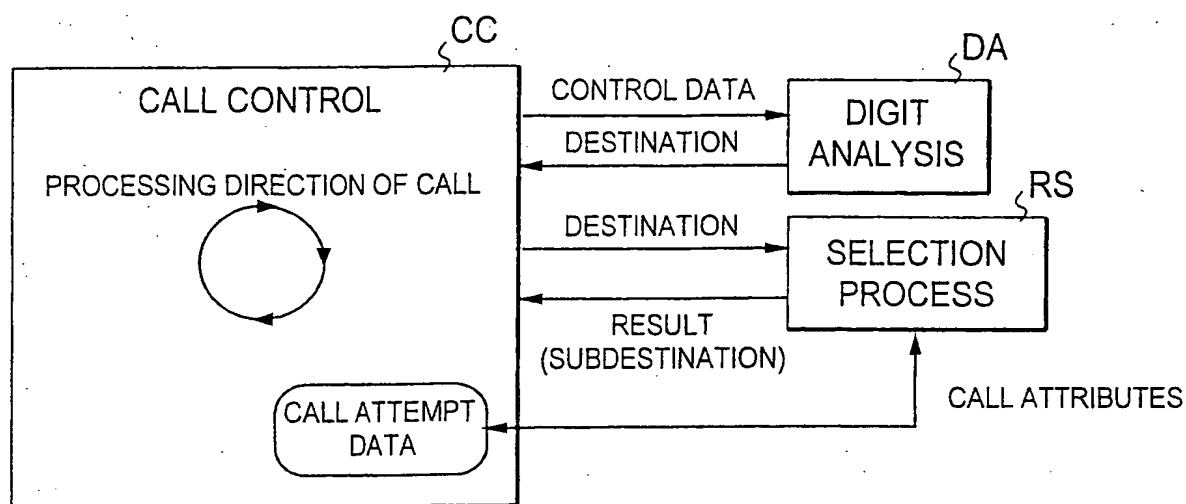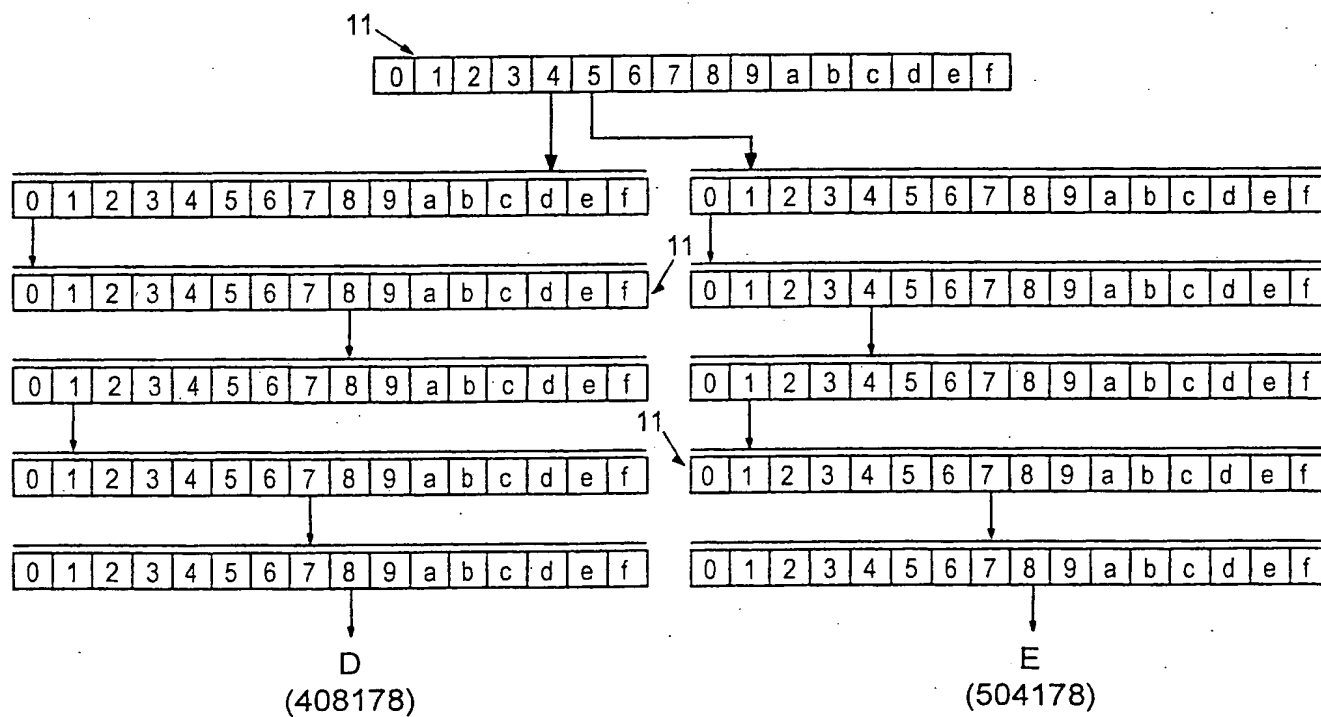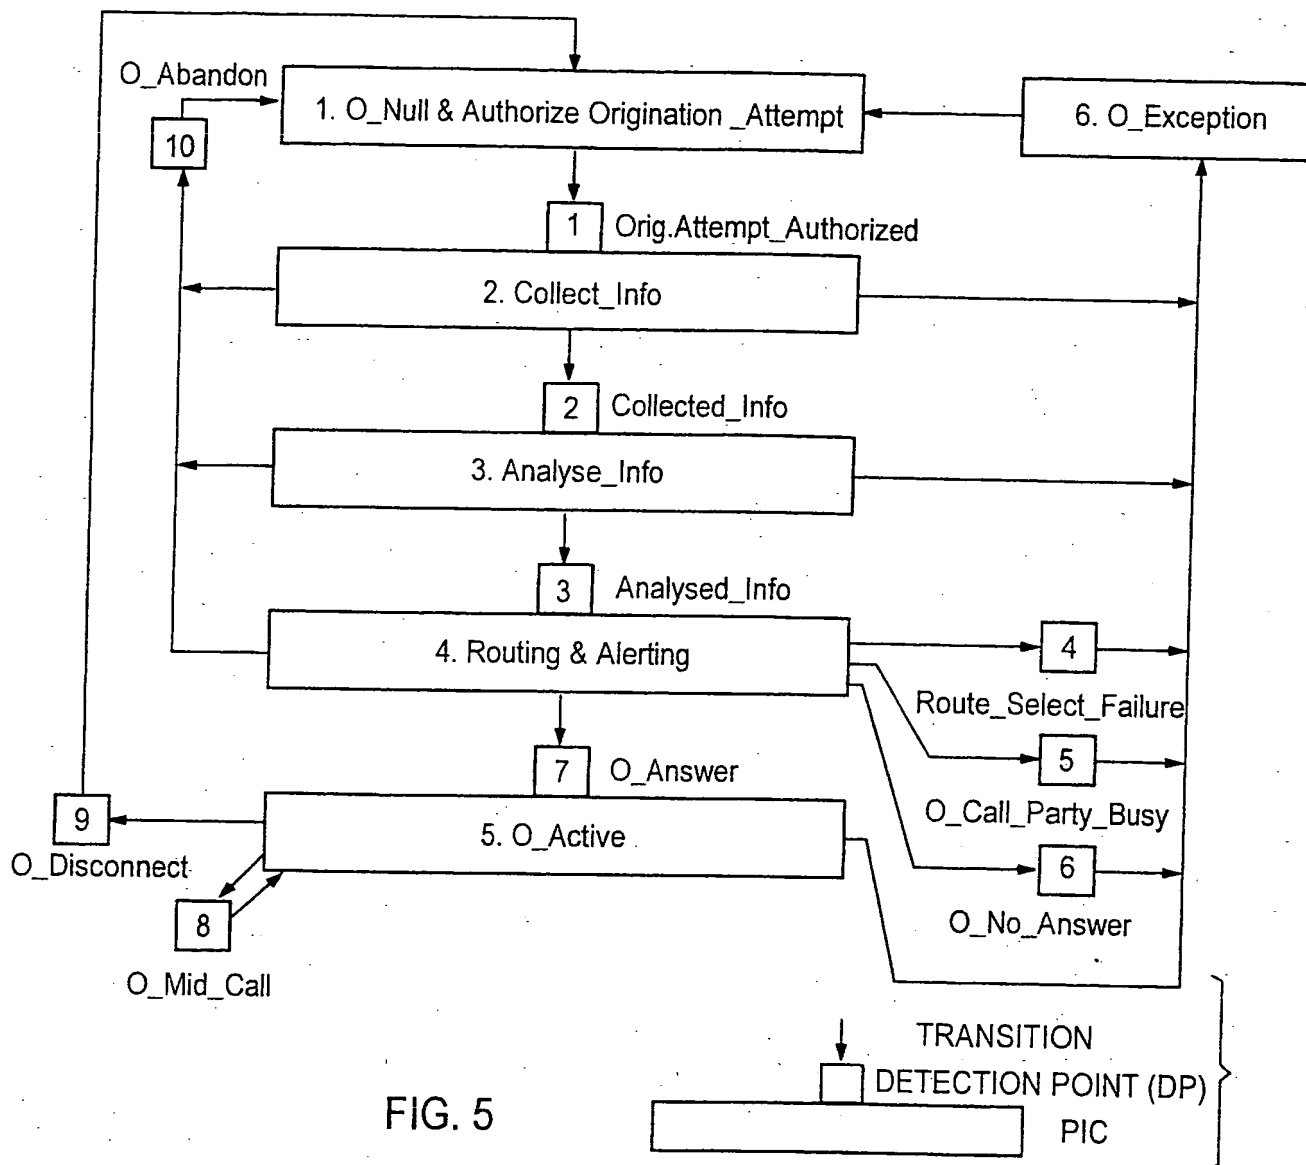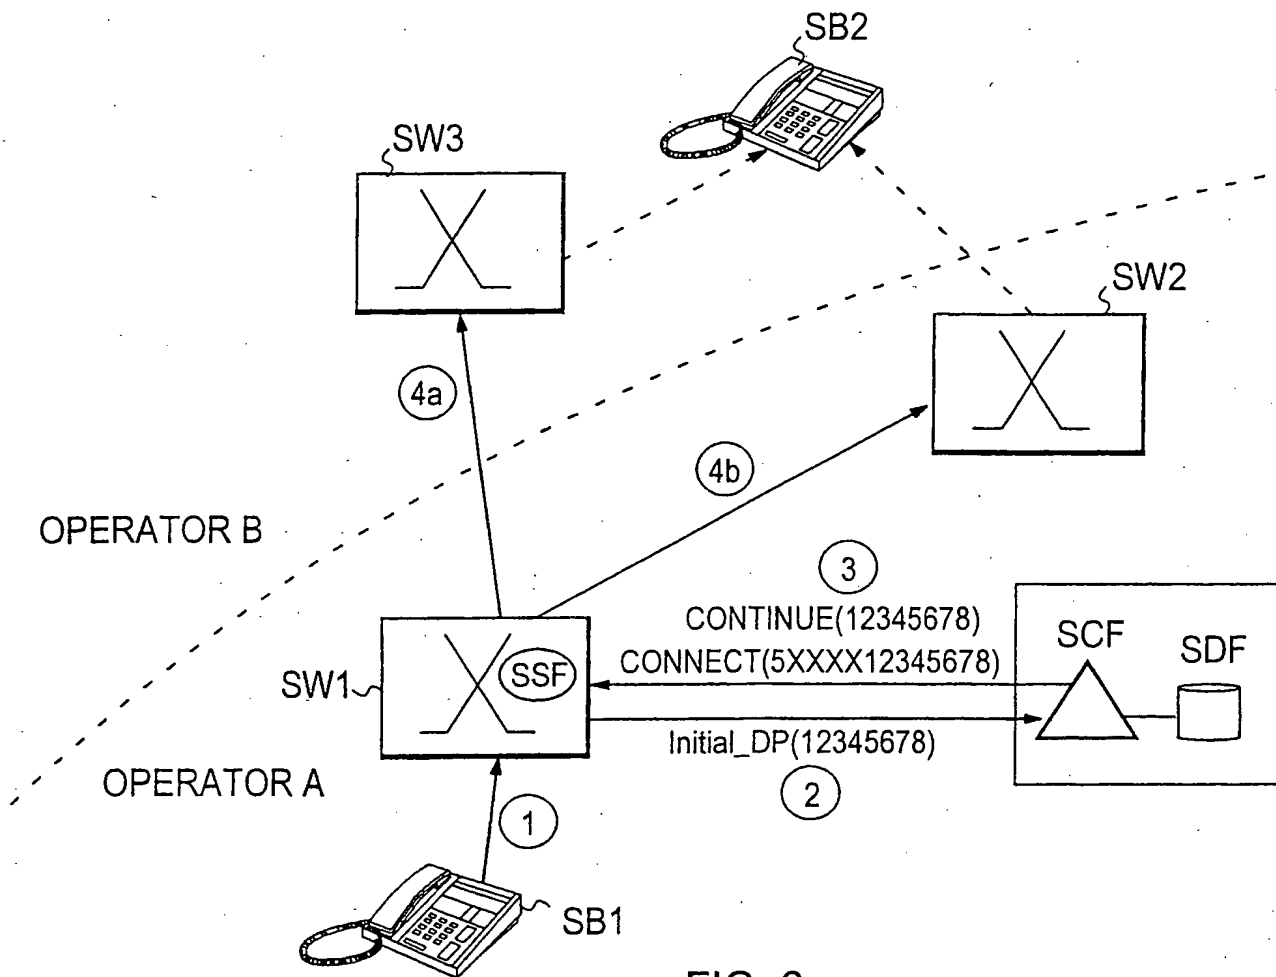
FIG. 5

PIC
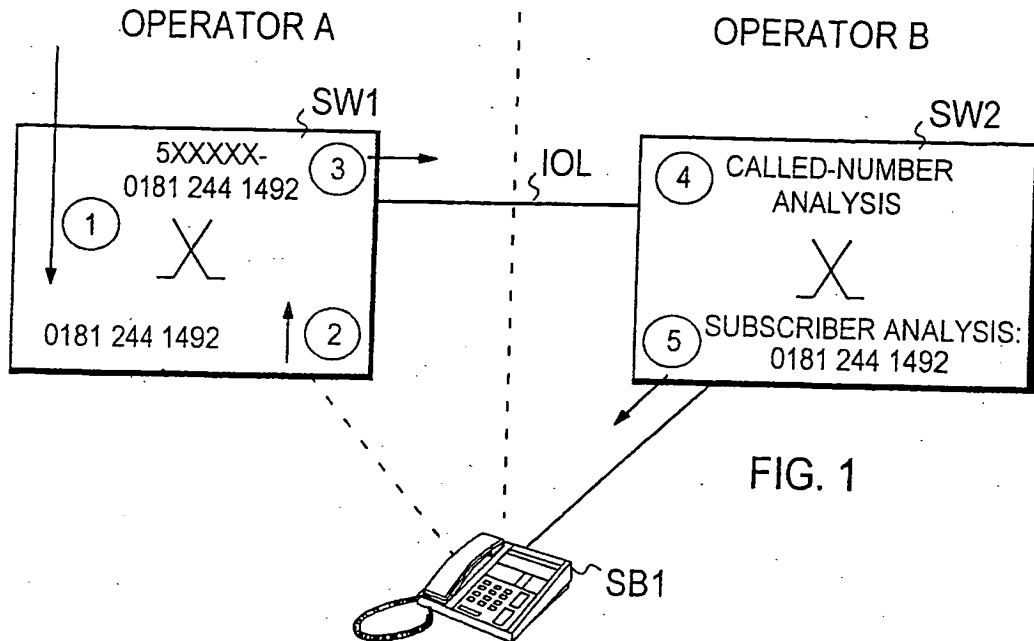
FIG. 6

INTERNATIONAL SEARCH REPORT

	International application No.
	PCT/FI 97/00792

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 3/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	US 5598464 A (THOMAS L. HESS ET AL), 28 January 1997 (28.01.97), see the whole document	1-5
P,X	US 5625681 A (GEORGE D. BUTLER, II), 29 April 1997 (29.04.97), see the whole document	1-5
A	EP 0708570 A2 (AT&T CORP.), 24 April 1996 (24.04.96), column 1, line 52 - column 2, line 37	1-5
A	EP 0710042 A2 (AT&T CORP.), 1 May 1996 (01.05.96), column 2, line 14 - column 6, line 15	1-5

|X| Further documents are listed in the continuation of Box C. |X| See patent family annex.

*	Special categories of cited documents:
"A"	document defining the general state of the art which is not considered to be of particular relevance
"E"	erlier document but published on or after the international filing date
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O"	document referring to an oral disclosure, use, exhibition or other means
"P"	document published prior to the international filing date but later than the priority date claimed

"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X"	document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y"	document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&"	document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
23 April 1998	24-04-1998

Name and mailing address of the ISA/	Authorized officer
Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Cecilia Sandell Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 97/00792

C (Continuation).   DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.

P,A	WO 9733441 A1 (STENTOR RESOURCE CENTRE INC.),
	     12 Sept 1997 (12.09.97), page 7, line 1 – page 9,
	     line 24
	
	                              --
	                    --------- 	
		1-5

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/04/98

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 5598464 A	28/01/97	NONE		
US 5625681 A	29/04/97	NONE		
EP 0708570 A2	24/04/96	CA JP US	2156002 A 8214059 A 5661792 A	19/04/96 20/08/96 26/08/97
EP 0710042 A2	01/05/96	JP US	8293917 A 5717749 A	05/11/96 10/02/98
WO 9733441 A1	12/09/97	AU CA	1865197 A 2178860 A	22/09/97 09/09/97